
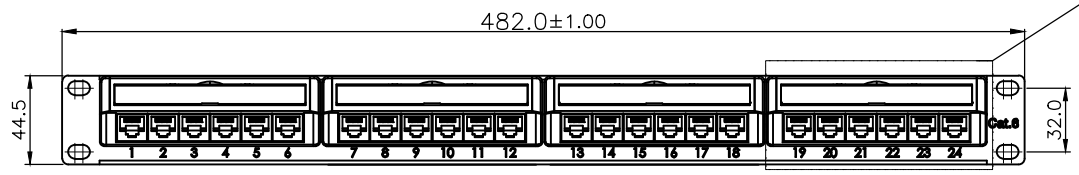
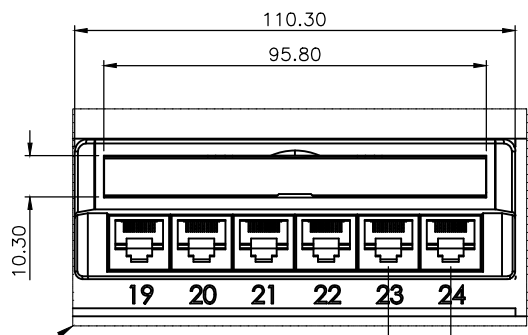
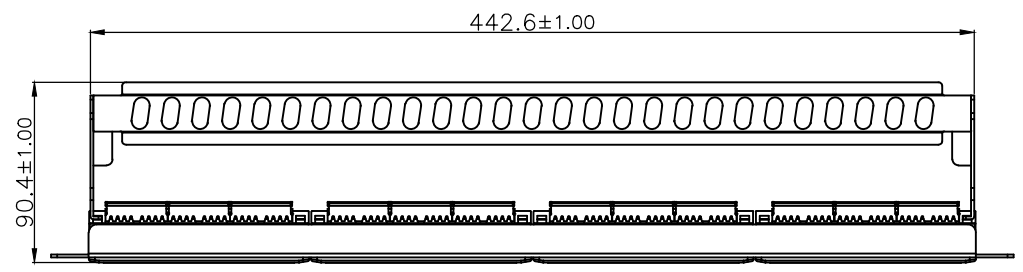
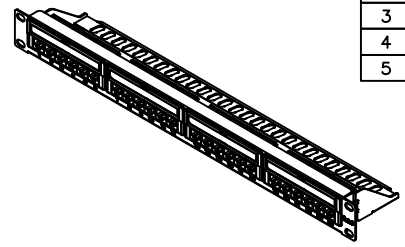


ITEM	PART	MATERIAL	FINISH
1	HOUSING	ABS	UL94 V-0
2	PANE FRAME	Carbon Steel	Powder Coating in Black Color
3	IDC MATERIAL	PC	UL94 V-0
4	IDC CONTACT	Phosphor Bronze T=0.5mm	Nickel Plating
5	WIRE	#23~26 AWG	-



SCALE 2:1 15.60

SPECIFICATION:
 1.VOLTAGE RATING : 125 VAC
 2.CURRENT RATING : 1.5 AMP
 3.CONTACT RESISTANCE : 100 MILLIOHMS MAX.
 4.INSULATION RESISTANCE : 1000 MEGOHMS MIN.© 500 VDC
 5.DIELECTRIC STRENGTH : 750 VAC 60Hz, 1MIN.
 6.STORAGE: -40°C TO +85°C
 7.OPERATION: 0°C TO 70°C
 CONFORMING TO TIA/EIA 568B
 MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68. SUBPART F.

PART NUMBER:
 V PP 1 B - 6 4 0 24 x - C336 S
 Contact Gold Plated:
 1-3u" 2-6u" 3-15u"
 4-30o" 5-50u"
 Lable Type:
 S-Standard

XO MARK	NEW DESIGN	Bella	080423'	REV. 0		UNLESS OTHERWISE SPECIFIED TOLERANCE	NAME	24 Port Patch Panel,1U 19",UTP Cat.6		RoHS THIS IS A ROHS COMPLIANT COMPONENT/ PRODUCT.	 維將科技股份有限公司
	REVISION RECORD	DRAWN	DATE			Dimension Range	Tolerance	SCALE NA	UNIT mm		
						X.X ±0.35		SEE NOTE	VPP1B-64024x-C336S		
						X.XX ±0.25	SIZE A4				
						X.XXX ±0.15	SHEET 1/1				
						ANGLE ±5°					